


STAR COMBINER

165 VHF double cavity

Combiners are a vital system component for improving the quality of ATC radio communications. They are used to allow several radio channels to operate at the same site using a common antenna thus saving installation space. Each channel consists of two cavities connected in series. Their high power rating make them ideal for working with AM transmitters with high peak power. The combiner can be adjusted to obtain the optimum combination of selectivity and insertion loss. The combiners can be supplied with or without external isolators. The Star Combiners are installed in more 4 units 19" standard cabinets.

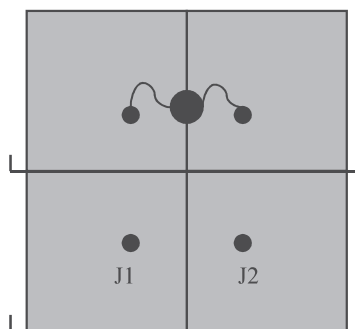

MCPS165-V/2-2

Electrical Specifications

Frequency band:	118 - 144 MHz
Impedance:	50 Ω
Input Power	100W CW
Insertion loss:	Adjustable 1.5 ÷ 4 dB

Mechanical Specifications

Connector Type:	N Female
Dimensions:	19" rack, 4HU, depth 670 mm
Operating temp.:	-10°C to +55°C
Tuning method:	Rotary knob, telescopic movement

Combiners	Channels	Cabinet 4HU	Total height HU	Attenuation dB ±500 kHz at 127.5 MHz
MCPS165-V/2-2	2	2	8	≥ 30
MCPS165-V/3-3	3	3	12	≥ 30
MCPS165-V/4-4	4	4	16	≥ 30
MCPS165-V/6-6	6	6	24	≥ 30

TELMEC Soc. Coop a r.l. Via A. Meucci, 8 –50015 Grassina, Florence, ITALY



Tel. +39 055 644071/644087 Fax +39 055 641485 E-mail: info@telmec.net - www.telmec.net

We reserve the right to modify these data without any notice